

Indirect UV Air Disinfection Fixture - UV-C - Destroys Airborne Bacteria & Viruses - 120V - 7.5W
Total UV Output - Wall Mount - 10' 16/3 SOOW Cord
IND-AH-UVC-LF-24-SF-WLM-10C-120V



This unit is Made In USA - Manufactured in Texas
IND-AH-UVC-LF-24-SF-WLM-10C-120V Indirect UV Air Disinfection Fixture

Lamp Technology: UV-C Fluorescent
Dimensions: 24.00"L x 4.50"W x 7.875"H
Weight: 38 lbs
Voltage: 120V AC, 50/60 Hz
Total Watts: 20W
Total UV Output: 7.5W
Expected Lifespan: 8,000+ Hours
UV Wavelength: 254nm
Lamp Base: Medium Bi-Pin
Replacement Lamp: -
Beam Angle: 180°
Light Configuration: Flood
Amps: -
Ambient Operating Temp Range: -
Materials: 304 Stainless Steel Enclosure
Front Panel: Louvers
Mounting: Wall Mount
Wiring: 10' 16/3 SOOW Cord w/ Cord Cap
Cord Cap: 5-15 Straight, L5-15 Twist or Pigtail

PLEASE NOTE: UV-C light can cause temporary or permanent loss of vision, and temporary acute redness or ulceration (mild to severe sunburn) to exposed skin. To prevent exposure, do not operate the device in any application that allows UV-C light to be visible during operation. NEVER LOOK DIRECTLY AT THE BULB OR DISINFECTING TARGET ZONE. DO NOT touch bulb with bare hands. The oils in your skin will damage the lamp. Fingerprints will result in reduced performance and significantly reduce the lifespan of the lamp unless they are removed with alcohol. Please read instruction manual for UV safety requirements before operating.

This unit is Made In USA - Manufactured in Texas

The IND-AH-UVC-LF-24-SF-WLM-10C-120V from Larson Electronics is an Indirect Ultraviolet Air Disinfection Fixture that works to disinfect the upper room air of occupied spaces via germicidal ultraviolet (UV) rays. This unit helps to reduce the risk of cross infection and minimizes the exposure of occupants to infectious airborne microbes. This stainless steel air disinfection unit features a single 20 watt UV bulb that produces 7.5 watts of UV output at a wavelength of 254nm. The IND-AH-UVC-LF-24-SF-WLM-10C-120V is a wall mounted unit and operates on 120V AC

Ratings/Features

T10 Bulb Shape
Short-wave Germicidal Light
Destroys Airborne Bacteria and Viruses
EPA Reg. No 98409-1
EPA Est. No. 98409-TX-1

Special Orders - Requirements

Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-214-616-6180
Fax: 1-903-498-3364
E-mail: sales@larsonelectronics.com

current.

***Please note: This product produces UV light. Make sure to follow all safety guidelines and protocols found in the user manual. UVC light in the proper setting kills up to 99.9% of viruses, mold, spores and bacteria. [Click here to learn more about UVC and the corona virus*](#)**

The IND-AH-UVC-LF-24-SF-WLM-10C-120V is a powerful sanitation solution for industrial sites and commercial facilities. Equipped with a UVC fluorescent lamp, this system offers 7.5 watts of UV output at a wavelength of 254nm. The lights have an expected lifespan of 8,000+ hours and emit a flood beam pattern. The IND-AH-UVC-LF-24-SF-WLM-10C-120V can be used continuously in occupied areas such as restaurants, public spaces, and office buildings.

Operation: This indirect UV air disinfection fixture projects ultraviolet rays across the top of the room it is mounted in. The upper air in the room that passes through the UV rays via convection currents or forced air circulation is then sanitized. Bacteria and viruses present in the air that passes through the UV rays produced by the fixture are destroyed. The air in the room is constantly being purified as it flows through the UV rays being produced by the fixture. The IND-AH-UVC-LF-24-SF-WLM-10C-120V is capable of disinfecting the air within an area nine feet wide and 16.25 feet long from the front of the unit.

Construction: The enclosure of the IND-AH-UVC-LF-24-SF-WLM-10C-120V is built from 304 stainless steel. A series of front mounted louvers protects people from harmful UV light as well as maximizing the amount of UV rays that are projected across the upper air of the room. Parabolic reflectors with specular aluminum inserts direct as much light from the bulb out of the unit as possible.

[Click Photos to Enlarge](#)



5-15 Straight Blade Plug
15 Amp / 125V Rated



L5-15 Twist Lock Plug
15 Amp / 125V Rated



Flying Leads / Pigtail Wires

Wiring/Plug: This unit comes with 10 feet of 16/3 chemical and abrasion resistant SOOW cord that is fitted with an industrial grade cord cap for easy connection to common wall outlets. Plug options include standard 5-15 15 amp straight blade plug for 110V wall outlets with ground or NEMA L5-15 15 amp twist lock plug for 125V twist lock outlets. Alternatively, we can provide flying leads with no plug for hard wire applications or for operators who prefer to wire in user provided cord caps. Please choose pigtail option below for flying leads with no plug.

Mounting: The IND-AH-UVC-LF-24-SF-WLM-10C-120V is designed to be wall mounted. Four mounting holes on the back of the enclosure allow for mounting to a flat and level vertical surface. The minimum mounting height is seven feet from the bottom of the unit to the floor. The mounting surface must be able to support 16 lb of weight.

Note on Environment: Sunlight and visible light fixtures do not impact the effectiveness of the disinfecting on this UVC sanitation product. Metal halide, high pressure sodium, fluorescent, and LED light fixtures can be left on. The UV radiation emitted from this product is not disrupted by any type of lighting in the environment. Put simply, NO it DOES NOT need to be dark in the area you plan to disinfect. The UV radiation is harmful to the eyes and skin, and that is why you should not be in the area while it is in operation. Please see user manual for additional safety information.

Applications: This ultraviolet indirect UV air disinfection unit can be used to continuously disinfect air of mold, allergens, airborne bacteria, viruses, and germs. The IND-AH-UVC-LF-24-SF-WLM-10C-120V is ideal for use in restaurants,

hospitals, clinics, laboratories, nursing homes, schools, food processing facilities, office buildings, conference rooms, universities, clean rooms, and many more. Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

Frequently Asked Questions (FAQ)

Q. How long does the fixture need to operate to kill viruses?

A. This fixture is designed to run continually. You do not turn the fixture off. It continually disinfects the air as viruses, bacteria, and other contaminants pass through.

Q. What if I want to disinfect a larger area than the square footage that is listed in the specifications of this product?

A. You need to purchase more units. The concept of this fixture is to completely cover the upper air section of your building/area. Please see Beaminfo file for effective coverage per fixture.

Q. What if obstacles are in the way of the UV light while it is disinfecting?

A. This product is designed to continually clean the air, not used for disinfecting surfaces. If you need a product to disinfect surfaces, please see our directional and omni-directional carts.

Q. Does this product come with UV lamps

A. Yes. This product will ship with UV lamps. The required UV lamps are included with your purchase.

Q. Is this unit safe to use in occupied areas?

A. YES! The louvers on this fixture make it safe to use in occupied areas. This unit is intended to run continually and is safe to use while people are in the area.

Q. Do I need to wear protective gear?

A. No. This unit is safe to use in occupied areas. This fixture has a safety switch to kill power to the unit before opening. Do not look directly into the fixture or at the UV light when changing bulbs.

Q. Is this product skin safe or eye safe?

A. YES! The louvers on this fixture make it safe to use in occupied areas. The louvers direct the UV radiation upwards so it does not come into direct contact with skin or eyes while in operation. This unit is intended to run continually and is safe to use while people are in the area.

Q. Does this product generate ozone?

A. No. UV lights can be made as ozone-producing or non-ozone producing. Ozone producing lamps leaves radiation in the atmosphere and require a 20-30 minute time after lamps are turned off before the radiation levels dissipate to a safe level before you can re-enter the room/area. The products that Larson Electronics manufactures DO NOT use ozone-producing lamps. This means that the radiation stops the second the light turns off. Once the light is turned off, it is safe to return to the area being disinfected by the light. Please read manual for UV safety requirements.

Q. Does this product kill the SARS-CoV-2 coronavirus?

A. Please see below link for effectiveness against viruses, including the 2019 SARS-CoV-2 coronavirus:
<https://www.larsonelectronics.com/images/product/LightingFacts/266985.PDF>

Q. Does this product kill COVID-19?

A. COVID-19 is the disease created from the SARS-CoV-2 coronavirus. Please see below link for effectiveness against




viruses, including the 2019 SARS-CoV-2 coronavirus:

<https://www.larsonelectronics.com/images/product/LightingFacts/266985.PDF>







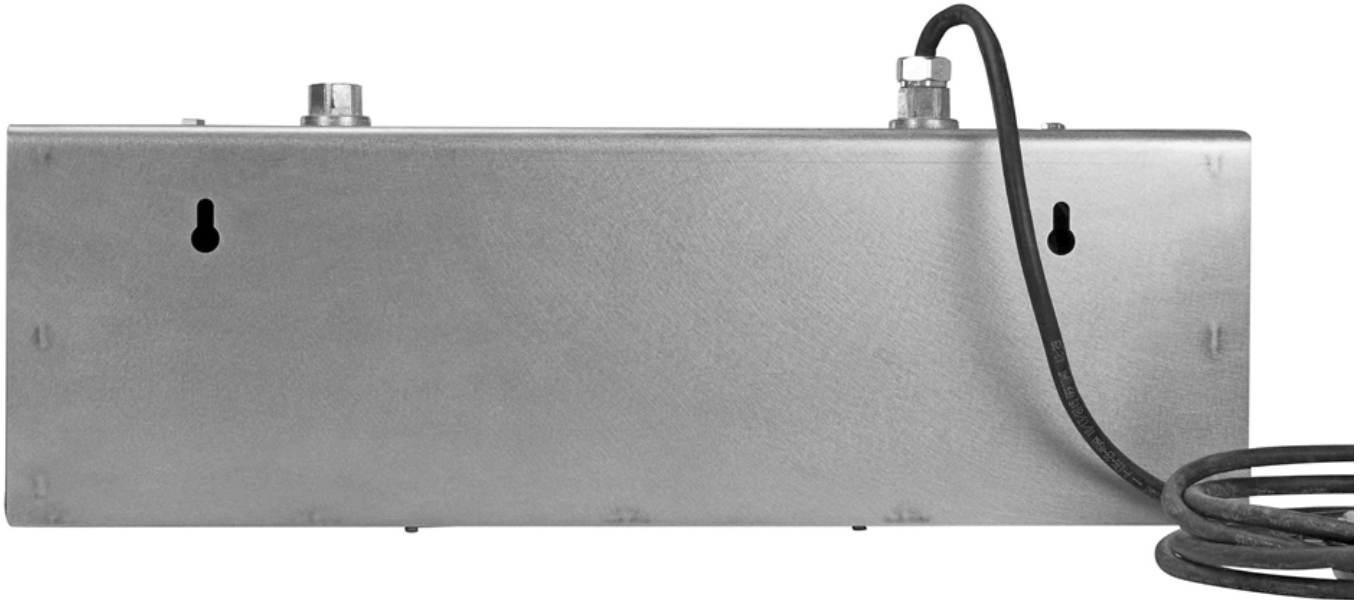

Options:

IND-AH-UVC-LF-24-SF-WLM-10C-120V-Cord Cap

Example: IND-AH-UVC-LF-24-SF-WLM-10C-120V-5.15

Cord Cap	
5-15 STRAIGHT	-5.15
L5-15 TWIST	-L5.15
PIGTAIL	-Pigtail

Links (Click on the below items to view):

- [Canadian CEC Certificate \(Commonly referred to as CSA Certificate\)](#)
- [Catalog Page - Product Series](#)
- [Certificate 1, Misc](#)
- [Certificate 4, Misc](#)
- [Eye Safety Information/Certificate](#)
- [Lighting Facts & Information](#)
- [Lighting Study \(Layout\) Example 1](#)
- [MSDS \(Material Safety Data Sheet](#)
- [Operations Manual](#)
- [Spectrum Curve \(Wavelength Graph\)](#)
- [USA NEC Certificate \(Commonly referred to as UL Certificate\)](#)
- [Wiring Diagram \(Online\)](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [HigResPic8](#)
- [HigResPic9](#)
- [HigResPic10](#)
- [Video1](#)
- [Video2](#)
- [Video3](#)
- [Video4](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)